

IC-M21



Big Screen, Tough Body and It's Water Resistant too!

Extra Large LCD Display

The large LCD* offers easy to read, large channel indication. The S-meter shows the signal strength of the received signal*. In addition, bright LCD backlighting is great for night time operation.

* 35x24 mm dimensions; To show the S-meter, set in set mode.



The photo shows actual display size.

Water Resistant Construction

The IC-M21 is built water resistant to endure 1 meter depth for 30 minutes. Non-corrosive construction ensures reliable long life communication out on the water.

* Equivalent to JIS waterproof specification grade 7 or IPX7 of the corresponding international standard IEC 529 (1989).

Swivel Belt Clip MB-87 For Standard

The newly designed MB-87 swivel belt clip prevents accidental dropping of the radio from your belt. To remove the radio, simply rotate it 180° and lift up.

Simple Operation

Well spaced, clearly labelled switches on the front panel provide easy one-hand access to frequently used functions.

Powerful 5W Output Power

The supplied BP-224 Ni-Cd battery pack generates a powerful 5W of output power and provides 8 hours of typical operating time*. For saving battery consumption, the output power can be reduced to 3W or 1W. The BP-223* alkaline cell case is also available during charging.

* Tx:Rx:Stand-by duty ratio = 5:5:90; BP-223 is optional for some versions.

Desktop Charger Supplied

The BC-150 desktop charger is a simple drop-in charger. It has screw holes for easy installation, and also a cradle to hold an unattached battery – You can leave it alone to charge even in choppy seas.

Other Features

- 4-step battery life indicator
- Dual/Tri-watch function
- Normal, priority and tag scanning
- Instant access to Ch 16, Ch 9 or programmable call channel
- 2-step power saver
- Key lock function
- 22 free programmable channels
(Ask your dealer for details)

SPECIFICATIONS

GENERAL

- Frequency range (MHz) :
 - Tx : 156.000–161.450
 - Rx : 156.000–163.425
 * Frequency range that may be subject to licensing conditions.
- Usable channels :
 - All International and U.S.A.* channels
 - * Available depending on version
- Type of emission : 16K0G3E (FM)
- Current drain (at 7.2V DC) :
 - Tx (at 5W output) : 1.5A typical
 - (at 1W output) : 0.7A typical
 - Rx (at AF max.) : 200mA typical
 - (at Stand-by) : 20mA typical
- Operating temp. range : –15°C to +55°C
- Antenna connector : STUD (50Ω)
- Dimensions : 61(W)×135(H)×41(D) mm
(proj. not included)
- Weight (approx.; with BP-224) : 360g

TRANSMITTER

- Output power : 5W (Hi), 3W (Mid) and 1W (Low)
- Germany version : 1W (Hi) 0.5W(Low)
- Modulation system : Variable reactance frequency modulation
- Max. frequency deviation : ± 5kHz
- Audio harmonic distortion : Less than 10% (at 60% mod.)
- Spurious emissions : Less than 0.25μW

RECEIVER

- Modulation system : Double-conversion superheterodyne
- Sensitivity (at 20dB SINAD) : –2dBμ emf typical
- Squelch sensitivity : 0dBμ emf typical (at threshold)
- Adjacent Ch. selectivity : 70dB
- Spurious response : 70dB

- Intermodulation rejection : 68dB
- Hum and noise ratio : 40dB
- Audio output power : 0.2W (typical at 10% distortion with an 8Ω load)

Supplied accessories:

- Battery pack, BP-224
- Battery case, BP-223*
- Battery charger, BC-150
- AC adapter, BC-147*
- Swivel belt clip, MB-87
- Antenna, FA-SC55V
- Hand strap (* Not supplied with some versions.)

Specifications for the IC-M21 are measured in accordance with EN301-178. All stated specifications are subject to change without notice or obligation.


OPTIONS

BATTERY PACK AND CASE



BP-223 BATTERY CASE
Battery case for R6 (AA)×6 alkaline cells.

BP-224 BATTERY PACK
7.2V/750mAh Ni-Cd battery pack. Provides 8 hours operating time (approx.).
(Tx (Hi): Rx: standby=5:5:90)




BC-150 DESKTOP CHARGER + BC-147 AC ADAPTER
Regularly charges the battery pack, BP-224 in 8 hours (approx.).



BC-119N DESKTOP CHARGER + AD-103 CHARGER ADAPTER + BC-145E/V/UK AC ADAPTER
For rapid charging of battery pack. An AC adapter may be supplied depending on version. Charging time: 1–2 hours.

BC-121N MULTI-CHARGER + AD-103 DESKTOP CHARGER ADAPTER + BC-124 AC ADAPTER
For rapid charging of up to 6 battery packs (Six AD-103's are required), BP-224. An AC adapter, BC-124, may be supplied, depending on version. Charging time: 1–2 hours.

BELT CLIPS

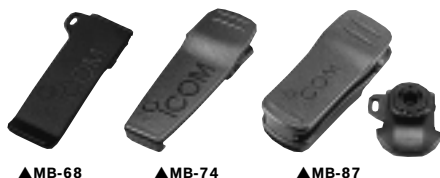

MB-68: Universal belt clip for attaching to your belt.

MB-74: Alligator type. Clips to almost anything in a variety of convenient places.

MB-87: Swivel belt clip. Prevents accidental dropping from your belt. Same as that supplied.



CP-17L CIGARETTE LIGHTER CABLE WITH NOISE FILTER

OPC-515L DC POWER CABLE
For use with the battery charger, BC-150 or BC-119N, instead of the AC adapter. (12–16 V DC required)

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone: (425) 454-8155 Fax: (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone : (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone: (604) 952-4266 Fax: (604) 952-0090
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone: 03 9387 0666 Fax: 03 9387 0022
URL : <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
Phone: 09 274 4062 Fax: 09 274 4708
URL : <http://www.icom.co.nz>

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone: 0211 346047 Fax: 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone: (93) 590 26 70 Fax: (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone: 01227 741741 Fax: 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone: 561 36 03 03 Fax: 561 36 03 00
URL : <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: (02) 2559 1899 Fax: (02) 2559 1874
URL : <http://www.asia-icom.com>

Beijing Icom Ltd.

1305, Wanshang Plaza, Shijingshan Road,
Beijing, China
Phone: (010) 6866 6337 Fax: (010) 6866 3553

Your local distributor/dealer:



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.